

# WKC5T-0.6-RSC5T/TXO

## Actuator and Sensor Cable, PUR – Extension Cable



### Features




- Female M12, angled, 4-pin + PE
- Male M12, straight, 4-pin + PE
- Jacket material: PUR
- Jacket color: orange
- Suitable for drag chain use
- Resistant to chemicals, UV radiation and oils
- Flame retardant (FT2 acc. to UL 1581, IEC 60332-2-2)
- Resistant to welding sparks
- Free from halogen, silicone, PVC and LABS
- Particularly resistant to abrasion
- Protection class: IP67, IP69K
- Cable length: 0.6 m


### Technical data

|                              |   |
|------------------------------|---|
| Type                         | WKC5T-0.6-RSC5T/TXO                     |
| ID                           | 6627247                                 |
| Remark to product            | !!! Pin 5 = PE !!!                      |
| Connector A                  | Female, M12 × 1, Angled, A-coded        |
| Number of Pins               | 4+PE                                    |
| Contacts                     | Brass, CuZn, Gold-plated                |
| Contact carriers             | Plastic, TPU, Black                     |
| Connector body               | Plastic, TPU, Black                     |
| Coupling nut/screw           | Brass, CuZn, Nickel-plated              |
| Seal                         | Plastic, FPM/FKM                        |
| Mechanical lifespan          | > 100 Mating cycles                     |
| Pollution degree             | 3                                       |
| Protection class             | IP67, IP69K, Only in screwed condition  |
| Connector B                  | Male, M12 × 1, Straight, A-coded        |
| Number of pins               | 4+PE                                    |
| Contacts                     | Brass, CuZn, Gold-plated                |
| Contact carriers             | Plastic, TPU, Black                     |
| Connector body               | Plastic, TPU, Black                     |
| Coupling nut/retaining screw | Brass, CuZn, Nickel-plated              |
| Mechanical life              | > 100 Mating cycles                     |
| Pollution degree             | 3                                       |
| Protection class             | IP67, IP69K, Only when screwed together |
| <b>Cable</b>                 |   |
| Cable diameter               | Ø 5.5 mm ±0.20                          |
| Cable length                 | 0.6 m                                   |
| Cable jacket                 | PUR, Orange                             |
| Core insulation              | PP                                      |

### Cable Cross-Section

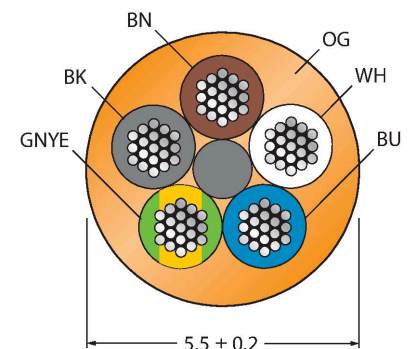

### Contact assignment

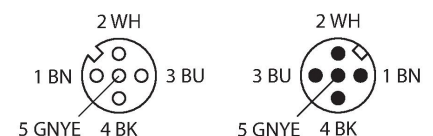

### Circuit Diagram



## Technical data

|   |                              |
|---|------------------------------|
| Core cross-section                              | 5 x 0.34 mm <sup>2</sup>     |
| Arrangement of strands                          | 42 x 0.1 mm                  |
| Core colors                                     | BN, WH, BU, BK, GNYE         |
| <b>Electrical properties at +20 °C</b>          |                              |
| Rated voltage                                   | 60 V                         |
| Test voltage                                    | 2000 V                       |
| Current   | 4 A                          |
| Insulation resistance                           | > 30.5 MΩ/km                 |
| forward resistance                              | max. 57 Ω/km                 |
| <b>Mechanical and chemical properties</b>       |                              |
| Bending radius (stationary installation)        | ≥ 5 x Ø                      |
| Bending radius (flexible use)                   | ≥ 10 x Ø                     |
| Bending cycles                                  | ≥ 5 million                  |
| Admissible acceleration                         | max. 5 m/s <sup>2</sup>      |
| Admissible travel path, horizontal              | 5 m (at 5 m/s <sup>2</sup> ) |
| Admissible travel path, vertical                | 2 m (at 5 m/s <sup>2</sup> ) |
| Admissible traversing speed                     | 3.3 m/s                      |
| Torsional stress                                | ± 180 °/m                    |
| Ambient temperature range (stationary)          | -50 °C...+80 °C              |
| Ambient temperature range (In motion)           | -25 °C...+80 °C              |
| Ambient temperature during drag chain operation | -25 °C...+60 °C              |
| Approvals                                       | cULus                        |

## Accessories

### TORQUE-WRENCH-SET-AS


6936170



Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)

### BLANK-LABEL-FOR-CORDSETS-TEL-TXL

6936206



Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant