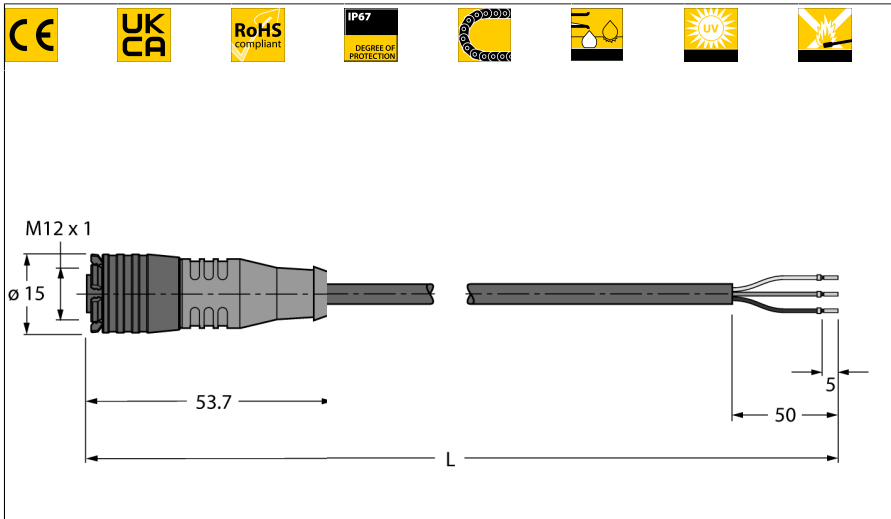


Actuator and Sensor Cable, PUR Quick-turn Connection Cable RKC4Q-2/TXL




- Female M12, straight, 3-pin
- Sheath material: PUR
- Sheath color: black
- Qualified for drag chain use
- Resistant to weld splatter
- Resistant to chemicals, UV radiation and oils
- Flame retardant
- Free from halogen, silicone, PVC and LABS
- Particularly resistant to abrasion
- RoHS conform
- Protection class IP67
- Cable length: 2.0 m

Type	RKC4Q-2/TXL
ID	6628010


Connector A	Female, M12 × 1, Straight, A-coded
Number of Pins	3
Contact carriers	Plastic, TPU, Black
Connector body	Plastic, TPU, Yellow
Interlocking sleeve	Plastic, PBT, black
Mechanical lifespan	> 50 Mating cycles
Pollution degree	3
Protection class	IP67, (plugged)

Cable	
Cable diameter	Ø 4.3mm ±0.20
Cable length	2 m m
Cable jacket	PUR, Black
Core insulation	PP
Core cross-section	3 x 0.34 mm ²
Arrangement of strands	42 x 0.1mm
Core colors	BN, BU, BK

Electrical properties at +20 °C	
Rated voltage	250VV
Test voltage	2000 V
Current	4AA
Insulation resistance	> 30.5 MΩ/km
forward resistance	max. 57 Ω/km





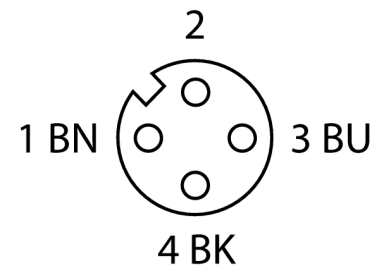


Circuit Diagram



Mechanical and chemical properties	
Bending radius (stationary installation)	$\geq 5 \times \varnothing$
Bending radius (flexible use)	$\geq 10 \times \varnothing$
Bending cycles	≥ 5 million
Admissible acceleration	max. 5 m/s ²
Admissible travel path, horizontal	5 m (at 5 m/s ²)
Admissible travel path, vertical	2 m (at 5 m/s ²)
Admissible traversing speed	3.3 m/s
Torsional stress	$\pm 180^\circ/\text{m}$
Ambient temperature range (stationary)	-50°C...+80°C
Ambient temperature range (In motion)	-25°C...+80°C
Ambient temperature during drag chain operation	-25°C...+60°C

Accessories

Type code	Ident no.		Dimension drawing
HAS8141-0	6905406	Field-wireable male connector, M12 × 1, straight, 4-pin, insulation piercing connection, cable feedthrough 4.0 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm ² , plastic housing, metal nut	 <p>Technical drawing of the HAS8141-0 connector. It shows a side view of a cylindrical component with a diameter of 15.3 mm and a total length of approximately 46.8 mm. The terminal length is 14 mm, and the mounting hole diameter is 13 mm. The label 'M12 x 1' is present.</p>
HAS8241-0	6905400	Field-wireable male connector, M12 × 1, angled, 4-pin, insulation piercing connection, cable feedthrough 4.0 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm ² , plastic housing, metal nut	 <p>Technical drawing of the HAS8241-0 angled connector. It shows a side view with a total length of 38.9 mm and a mounting hole diameter of 15 mm. The terminal length is 13 mm. The label 'M12 x 1' is present.</p>
BS8141-0	69010	Field-wireable male connector, M12 × 1, straight, 4-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm ² , plastic housing, metal retaining screw	 <p>Technical drawing of the BS8141-0 screw terminal connector. It shows a side view with a total length of approximately 60.4 mm and a diameter of 20.2 mm. The terminal length is 18 mm, and the mounting hole diameter is 13 mm. The label 'M12 x 1' is present.</p>
BS8241-0	69011	Field-wireable connector, M12 × 1, angled, 4-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm ² , plastic housing, metal retaining screw	 <p>Technical drawing of the BS8241-0 angled screw terminal connector. It shows a side view with a total length of 42.6 mm and a diameter of 20.2 mm. The terminal length is 18 mm, and the mounting hole diameter is 13 mm. The label 'M12 x 1' is present.</p>
BLANK-LABEL-FOR-CORDSETS-TEL-TXL	6936206	Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant	 <p>Technical drawing of the BLANK-LABEL-FOR-CORDSETS-TEL-TXL label. It shows a rectangular label with a length of 18 mm and a height of 4 mm.</p>